

FLOWCERT LITE

Technical Specifications:

The FlowCERT Lite open channel flow meter provides comprehensive flow monitoring with data logging and control functions for a complete range of flumes and weirs. It is compatible with a range of sensors in order to create a flow metering system to suit your application.



PHYSICAL:

Mounting Option:	Standard Wall Mount:
Controller Body Dimensions:	235 mm x 184 mm x 120 mm (9.3 in x 7.2 in x 4.7 in)
Weight:	Nominal 1 kg (2.2 lb)
Enclosure Material/Description:	Polycarbonate, flame resistant to UL94-5 V
Cable Entry Detail:	10 cable entry knock outs, 5 x M20, 1 x M16 underside, x 18 mm dia (PG11) at rear
Transducer Cable Extensions:	2-core screened
Maximum Separation:	Up to 1,000 m (3,280 ft)

ENVIRONMENTAL

IP Rating:	IP65 / NEMA 4X
Max. & Min. Temperature (Electronics):	-20 °C to +50 °C (-4 °F to +120 °F)
Flammable Atmosphere Approval:	For installation in non-flammable area only. Most compatible transducers suitable for flammable atmospheres. See sensor / transducer datasheet or brochure.
CE Approval:	Listed in the Certificate of Conformity within the manual

PERFORMANCE

Accuracy/Repeatability:	Dependent on application and sensor used. See sensor specification.
Resolution:	Dependent on application and sensor used. See sensor specification.
Min. & Max. Range:	0 mm to 15 m (0 in to 49.2 ft). Dependent on sensor used.
Echo Processing:	DATEM (Digital Adaptive Tracking of Echo Movement)
Rate Response:	Fully Adjustable

OUTPUTS


Analog Outputs:	Isolated (floating) output (to 150 V) of 4-20mA or 0-20mA into 500 Ω (user programmable and adjustable) 1 μa resolution
Digital Output:	Full Duplex RS232
Volt Free Contacts, Number, & Rating:	5 form "C" (SPDT) rated at 5A at 115 V/240 V AC
Display:	6 digits plus 12 character text, plus bar graph with direction indicators, remote communicator identifier, and program/run/test mode indicators

PROGRAMMING


On-board Programming:	By integral keypad
PC Programming:	Via RS232
Programming Security:	Via passcode (user selectable and adjustable)
Programmed Data Integrity:	Via non-volatile RAM, plus backup

SUPPLY

Power Supply:	115 V AC +5% / -10% 50/60 Hz, 230 V AC +5% / -10% 50/60 Hz, 22-28 V DC, 10 W maximum power (typically 6 W)
Fuses:	100 mA at 230 V AC, 200 mA at 115 V AC

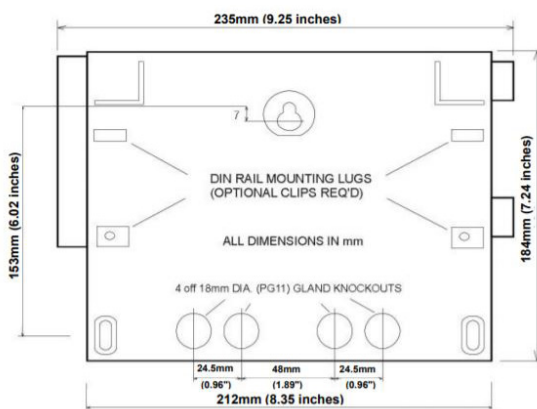

FlowCERT Lite Enclosure Drawing

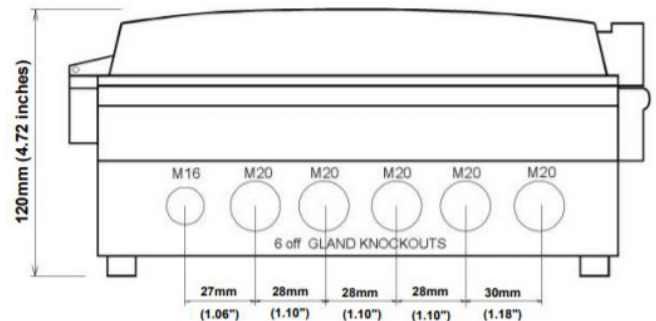

FlowCERT Lite Cable Entry Drawing

Delivering the Measure of Possibility

Pulsar Measurement offers worldwide professional support for all of our products, and our network of global partners all offer full support and training. Our facilities in Malvern, UK and Largo, USA are home to technical support teams who are always available to answer your call or attend your site when required. Our global presence, with direct offices in the UK, USA, Canada, and Malaysia, allows us to create close relationships with our customers and provide service, support, training, and information throughout the lifetime of your product.

For more information, please visit our website:

www.pulsarmeasurement.com



INFO@PULSARMEASUREMENT.COM

Pulsar Measurement is a trading name of Pulsar Process Measurement Ltd.

Copyright © 2021 Pulsar Measurement
Registered Address: 1 Chamberlain Square CS, Birmingham B3 3AX
Registered No.: 3345604 England & Wales

United States
+1 888-473-9546

Asia
+60 102 591 332

Canada
+1 855-300-9151

Oceania
+61 428 692 274

United Kingdom
+44 (0) 1684 891371

pulsarmeasurement.com