

BYPASS PIPE STOPPERS



The use of these pipe stoppers is advantageous if a higher rate of flow is required. The water passes through the stainless-steel centre part. The rubberized-fabric cover is put on this part and is exchangeable in case of defect. The diameter of the standard product line ranges from 100 to 1200 millimetres.

Bypass Pipe Stoppers PU-G

Type		PU 10 2 G	PU 10/15 2 G	PU 15 2 G	PU 15/20 2 G	PU 10/20 2 G	PU 20/50 4 G	PU 50/80 4 G	PU 50/80 6 G	PU 50/80 12 G	PU 50/120 4 G	PU 50/120 6 G	PU 50/120 12 G
Part - No.		1220	1221	1222	1223	1206	1207	1239	1240	1209	1241	1242	1219
Pipe diameter	mm	100	100–150	150	150–200	100–200	200–500	500–800	500–800	500–800	500–1200	500–1200	500–1200
Operating pressure	bar	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5
Test pressure	bar	2,0	2,0	2,0	2,0	2,0	2,0	2,0	2,0	2,0	2,0	2,0	2,0
Back pressure	bar	0,5	0,5	0,5	0,5	0,5	0,5	0,5	0,5	0,5	0,5	0,5	0,5
Diameter	mm	90	90	115	115	90	185	450	450	450	450	450	450
Cylinder length	mm	230	290	230	290	550	620	680	680	680	970	970	970
Total length	mm	320	380	320	380	650	700	830	830	830	1120	1120	1120
Weight	kg	2,3	2,9	3	3,5	4,5	9,5	38	38	38	48	48	48
Bypass		2"	2"	2"	2"	2"	4"	4"	6"	12"	4"	6"	12"

HIGH-PRESSURE PIPE STOPPERS

If the standard sealing pipe stoppers cannot be used due to high back pressure, these high-pressure pipe stoppers are recommendable. Higher operational pressure is ensured by the special Kevlar reinforcement used in all the stoppers. The diameter of the standard product line ranges from 50 to 600 millimetres.




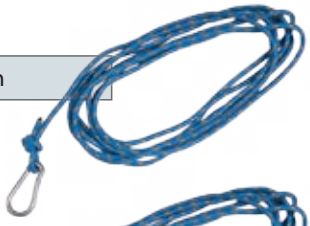












High-Pressure Pipe Stoppers UU – 6 bar

Type		UU 5/7	UU 7/10	UU 10/15	UU 15/20	UU 20/30	UU 30/40	UU 50/60
Part - No.		1119	1113	1114	1115	1116	1117	1118
Pipe diameter	mm	50–70	70–100	100–150	150–200	200–300	300–400	500–600
Operating pressure	bar	6,0	6,0	6,0	6,0	6,0	6,0	6,0
Test pressure	bar	7,8	7,8	7,8	7,8	7,8	7,8	7,8
Back pressure	bar	3,0	3,0	3,0	3,0	3,0	3,0	3,0
Diameter	mm	47	67	96	135	190	290	450
Cylinder length	mm	340	330	510	550	580	730	1050
Total length	mm	390	380	570	610	640	790	1130
Weight	kg	0,5	0,6	1,5	2,5	4,9	8,5	25

High-Pressure Pipe Stoppers UU – 12 bar

Type		UU 7/9	UU 10/13	UU 14/17	UU 20/25	UU 30/35
Part - No.		1129	1130	1131	1132	1133
Pipe diameter	mm	70–90	100–130	140–170	200–250	300–350
Operating pressure	bar	12	12	12	12	12
Test pressure	bar	16	16	16	16	16
Back pressure	bar	10	10	10	10	10
Diameter	mm	67	96	135	190	290
Cylinder length	mm	330	510	550	580	730
Total length	mm	380	570	610	640	790
Weight	kg	0,6	1,5	2,5	4,9	8,5

ACCESSORIES

Part-No.	Description	Image	Part-No.	Description	Image
2001	Inflation hose with quick couplings, 3 m		2046	Rope with snap hook, 5 m	
2002	Inflation hose with nipples, 5 m		2113	Rope with snap hooks, 10 m	
2003	Inflation hose with nipples, 10 m		2065	Adapter quick coupling – tire ventil	
2068	Safety and control gauge 0,5 bar – V 0,5		2010	Venting and measuring hose, 6 m for PU 10/20	
2133	Safety and control gauge 0,6 bar – V 0,6		2009	Venting and measuring hose, 6 m for PU 20/50, PU 50/80, PU 50/120	
2083	Safety and control gauge 0,7 bar – V 0,7		2005	Pressure reducer 200/8 bar	
2079	Safety and control gauge 1 bar – V 1		2060	Venting and measuring hose, 6 m for PU 30/60 F, PU 50/100 F	
2039	Safety and control gauge 1,5 bar – V 1,5		2066	Pressure reducer 300/8 bar	
2080	Safety and control gauge 2,5 bar – V 2,5		2011	Stopcock with Storz D couplings	
2075	Safety and control gauge 6 bar – V 6		2012	Stopcock with Storz C couplings	
50152	Cylinder 7 l			2013	Stopcock with Storz B couplings
50151	Cylinder 5 l	2078		Stopcock with Storz A couplings	
2036	Adapter for tireventil				
2047	Quick coupling for tireventil				

Part-No. Description

2058 Manometer for the leak test with air 0–250 mbar with hose, 5 m




2086 Digital manometer for the leak test with air with hose, 5 m 0–2000 mbar

2128 Digital manometer for the leak test with air with hose, 5 m 0–200 mbar



2032 Adapter for the leak test with air N – D 25

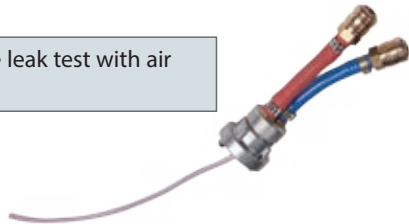


2035 Adapter for the leak test with air N – C 52




2073 Adapter for the leak test with air N – B 75



2064 Adapter for the leak test with air N – PUK 1/2"



2069 Adapter for the leak test with air N – PUK 1"



2138 Adapter for the leak test with air N – PUK 2"



Part-No. Description

50435 Hand pump



50103 Foot pump



2023 Reduction Storz D 25/GEKA-coupling



2061 Reduction Storz C 52/GEKA-coupling



2070 Reduction Storz B 75/GEKA-coupling



2025 Reduction GEKA/quick coupling



2088 Adapter for the leak test with water NV – C 52



2087 Adapter for the leak test with water NV – B 75



