

SHORT PIPE STOPPERS

Due to their length, these pipe stoppers are especially suitable for sealing of house connections but they are often used for leak tests. The short pipe stoppers are made of top-quality rubber and their metal parts are made of stainless materials.

The diameter of the standard product line ranges from 50 to 400 millimetres.



Short pipe stoppers UK


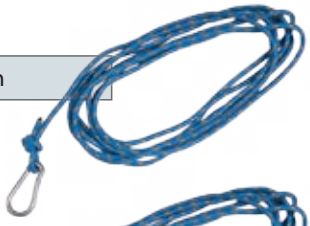
















| Type | | UK 5/7 | UK 7/10 | UK 10 | UK 10/15 | UK 11/17 | UK 15 | UK 15/20 | UK 20 | UK 20/25 | UK 25/30 | UK 30/40 |
|--------------------|-----|--------|---------|-------|----------|----------|-------|----------|-------|----------|----------|----------|
| Part - No. | | 1404 | 1411 | 1401 | 1406 | 1416 | 1402 | 1409 | 1403 | 1410 | 1407 | 1418 |
| Pipe diameter | mm | 50–70 | 70–100 | 100 | 100–150 | 110–170 | 150 | 150–200 | 200 | 200–250 | 250–300 | 300–400 |
| Operating pressure | bar | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 |
| Test pressure | bar | 3,3 | 3,3 | 3,3 | 3,3 | 3,3 | 3,3 | 3,3 | 3,3 | 3,3 | 3,3 | 3,3 |
| Back pressure | bar | 0,5 | 0,5 | 0,5 | 0,5 | 0,5 | 0,5 | 0,5 | 0,5 | 0,5 | 0,5 | 0,5 |
| Diameter | mm | 46 | 67 | 90 | 90 | 100 | 140 | 140 | 180 | 180 | 240 | 290 |
| Cylinder length | mm | 125 | 130 | 160 | 160 | 180 | 220 | 220 | 260 | 260 | 290 | 270 |
| Total length | mm | 180 | 185 | 220 | 220 | 240 | 280 | 280 | 320 | 320 | 350 | 330 |
| Weight | kg | 0,3 | 0,4 | 0,6 | 0,7 | 0,9 | 1,2 | 1,3 | 2,3 | 2,4 | 4,2 | 5,7 |

Short Bypass Pipe Stoppers PUK

| Type | | PUK 5/7 | PUK 7/10 | PUK 10/15 | PUK 11/17 | PUK 15/20 | PUK 20/25 | PUK 25/30 | PUK 30/40 |
|--------------------|-----|---------|----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Part - No. | | 1415 | 1405 | 1408 | 1417 | 1412 | 1413 | 1414 | 1420 |
| Pipe diameter | mm | 50–70 | 70–100 | 100–150 | 110–170 | 150–200 | 200–250 | 250–300 | 300–400 |
| Operating pressure | bar | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 |
| Test pressure | bar | 3,3 | 3,3 | 3,3 | 3,3 | 3,3 | 3,3 | 3,3 | 3,3 |
| Back pressure | bar | 0,5 | 0,5 | 0,5 | 0,5 | 0,5 | 0,5 | 0,5 | 0,5 |
| Diameter | mm | 46 | 67 | 90 | 100 | 140 | 180 | 240 | 290 |
| Cylinder length | mm | 125 | 130 | 160 | 180 | 220 | 260 | 290 | 270 |
| Total length | mm | 180 | 185 | 220 | 240 | 280 | 320 | 350 | 330 |
| Weight | kg | 0,3 | 0,4 | 0,8 | 1 | 2 | 3,6 | 5,9 | 7,5 |
| Bypass | | 1/4" | 1/2" | 1/2" | 1/2" | 1" | 2" | 2" | 2" |



ACCESSORIES

| Part-No. | Description | Image | Part-No. | Description | Image | |
|----------|--|---|---|---|---|--|
| 2001 | Inflation hose with quick couplings, 3 m |  | 2046 | Rope with snap hook, 5 m |  | |
| 2002 | Inflation hose with nipples, 5 m |  | 2113 | Rope with snap hooks, 10 m |  | |
| 2003 | Inflation hose with nipples, 10 m | | 2065 | Adapter quick coupling – tire ventil |  | |
| 2068 | Safety and control gauge 0,5 bar – V 0,5 |  | 2010 | Venting and measuring hose, 6 m for PU 10/20 |  | |
| 2133 | Safety and control gauge 0,6 bar – V 0,6 | | 2009 | Venting and measuring hose, 6 m for PU 20/50, PU 50/80, PU 50/120 |  | |
| 2083 | Safety and control gauge 0,7 bar – V 0,7 | | 2060 | Venting and measuring hose, 6 m for PU 30/60 F, PU 50/100 F |  | |
| 2079 | Safety and control gauge 1 bar – V 1 | | 2011 | Stopcock with Storz D couplings |  | |
| 2039 | Safety and control gauge 1,5 bar – V 1,5 | | 2012 | Stopcock with Storz C couplings |  | |
| 2080 | Safety and control gauge 2,5 bar – V 2,5 | | 2013 | Stopcock with Storz B couplings |  | |
| 2075 | Safety and control gauge 6 bar – V 6 |  | 2078 | Stopcock with Storz A couplings |  | |
| 2005 | Pressure reducer 200/8 bar | |  | | | |
| 2066 | Pressure reducer 300/8 bar | | | | | |
| 50152 | Cylinder 7 l |  | | | | |
| 50151 | Cylinder 5 l | | | | | |
| 2036 | Adapter for tireventil |  | | | | |
| 2047 | Quick coupling for tireventil |  | | | | |

Part-No. Description

2058 Manometer for the leak test with air 0–250 mbar with hose, 5 m




2086 Digital manometer for the leak test with air with hose, 5 m 0–2000 mbar

2128 Digital manometer for the leak test with air with hose, 5 m 0–200 mbar



2032 Adapter for the leak test with air N – D 25

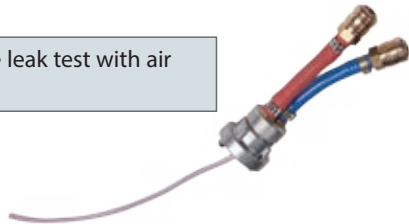


2035 Adapter for the leak test with air N – C 52



2073 Adapter for the leak test with air N – B 75



2064 Adapter for the leak test with air N – PUK 1/2"



2069 Adapter for the leak test with air N – PUK 1"



2138 Adapter for the leak test with air N – PUK 2"



Part-No. Description

50435 Hand pump



50103 Foot pump



2023 Reduction Storz D 25/GEKA-coupling



2061 Reduction Storz C 52/GEKA-coupling



2070 Reduction Storz B 75/GEKA-coupling



2025 Reduction GEKA/quick coupling



2088 Adapter for the leak test with water NV – C 52



2087 Adapter for the leak test with water NV – B 75



