


# SKITTLE PIPE STOPPERS

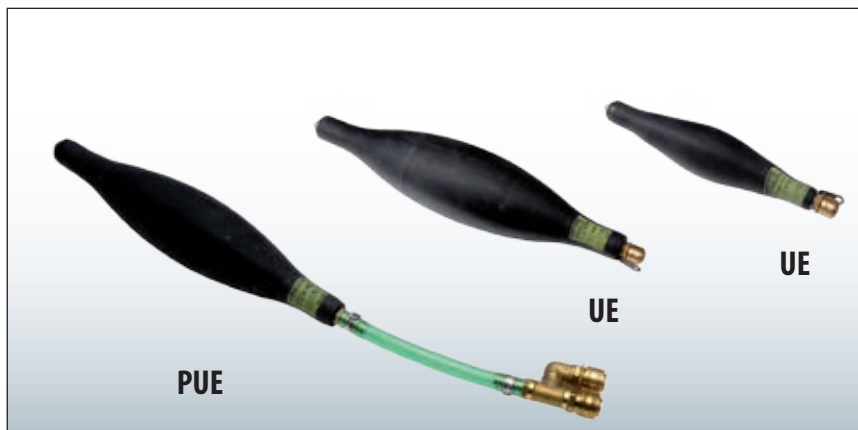

These pipe stoppers are used for sealing of pipelines with a restricted inlet area. Owing to their shape and flexibility they enable easy installation. Leak tests of house connections with air or water with these pipe stoppers are very easy, too. The standard product line covers a range from 50 to 200 millimetres.

## Skittle Pipe Stoppers UE

Type		UE 5/10	UE 8/15	UE 12/20
Part - No.		1705	1701	1702
Pipe diameter	mm	50–100	80–150	120–200
Operating pressure	bar	2,5	2,0	1,5
Test pressure	bar	3,5	2,6	2,0
Back pressure	bar	1,0	1,0	1,0
Diameter	mm	48	78	116
Length	mm	300	380	520
Total length	mm	350	430	570
Opening for insertion	mm	35	40	50
Weight	kg	0,35	0,48	0,95

## Test Skittle Pipe Stoppers PUE

Type		PUE 5/10	PUE 8/15	PUE 12/20
Part - No.		1706	1703	1704
Pipe diameter	mm	50–100	80–150	120–200
Operating pressure	bar	2,5	2,0	1,5
Test pressure	bar	3,5	2,6	2,0
Back pressure	bar	1,0	1,0	1,0
Diameter	mm	48	78	116
Length	mm	300	380	520
Total length	mm	520	600	770
Opening for insertion	mm	35	40	50
Weight	kg	0,55	0,68	1,17
Bypass	mm	4	4	6

# HALFROUND PIPE STOPPERS

These pipe stoppers are due to their length suitable for sealing of house connections and domestic pipe systems. Owing to their shape, they are easy to install in pipelines with bends. Because they are short the air















requirement is low and easily ensured by foot or hand pump. The standard product line covers a range from 50 to 200 millimetres.



## Halfround Pipe Stoppers UR

Type		UR 5/7	UR 7/10	UR 10/15	UR 15/20
Part - No.		9109	9110	9042	9094
Pipe diameter	mm	50–70	70–100	100–150	150–200
Operating pressure	bar	2,5	2,5	2,5	2,5
Test pressure	bar	3,3	3,3	3,3	3,3
Back pressure	bar	0,5	0,5	0,5	0,5
Diameter	mm	46	67	90	140
Cylinder length	mm	95	100	120	170
Total length	mm	140	155	180	230
Weight	kg	0,3	0,4	0,5	1

# ACCESSORIES

Part-No.	Description	Image	Part-No.	Description	Image
2001	Inflation hose with quick couplings, 3 m		2046	Rope with snap hook, 5 m	
2002	Inflation hose with nipples, 5 m		2113	Rope with snap hooks, 10 m	
2003	Inflation hose with nipples, 10 m		2065	Adapter quick coupling – tire ventil	
2068	Safety and control gauge 0,5 bar – V 0,5		2010	Venting and measuring hose, 6 m for PU 10/20	
2133	Safety and control gauge 0,6 bar – V 0,6		2009	Venting and measuring hose, 6 m for PU 20/50, PU 50/80, PU 50/120	
2083	Safety and control gauge 0,7 bar – V 0,7		2005	Pressure reducer 200/8 bar	
2079	Safety and control gauge 1 bar – V 1		2060	Venting and measuring hose, 6 m for PU 30/60 F, PU 50/100 F	
2039	Safety and control gauge 1,5 bar – V 1,5		2066	Pressure reducer 300/8 bar	
2080	Safety and control gauge 2,5 bar – V 2,5		2011	Stopcock with Storz D couplings	
2075	Safety and control gauge 6 bar – V 6		2013	Stopcock with Storz B couplings	
50152	Cylinder 7 l		2078	Stopcock with Storz A couplings	
50151	Cylinder 5 l		2036	Adapter for tireventil	
2047	Quick coupling for tireventil				

**Part-No. Description**

2058 Manometer for the leak test with air 0–250 mbar with hose, 5 m




2086 Digital manometer for the leak test with air with hose, 5 m 0–2000 mbar

2128 Digital manometer for the leak test with air with hose, 5 m 0–200 mbar



2032 Adapter for the leak test with air N – D 25

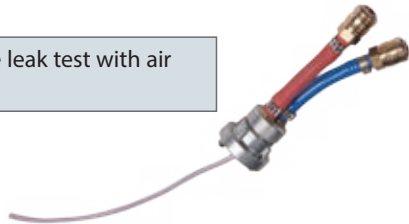


2035 Adapter for the leak test with air N – C 52




2073 Adapter for the leak test with air N – B 75



2064 Adapter for the leak test with air N – PUK 1/2"



2069 Adapter for the leak test with air N – PUK 1"



2138 Adapter for the leak test with air N – PUK 2"



**Part-No. Description**

50435 Hand pump



50103 Foot pump



2023 Reduction Storz D 25/GEKA-coupling



2061 Reduction Storz C 52/GEKA-coupling



2070 Reduction Storz B 75/GEKA-coupling



2025 Reduction GEKA/quick coupling



2088 Adapter for the leak test with water NV – C 52



2087 Adapter for the leak test with water NV – B 75



